
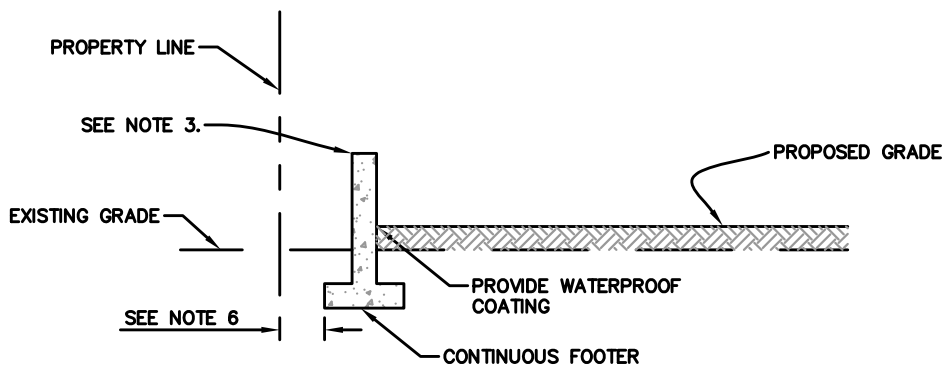


# EXHIBIT I

## TYPICAL PERIMETER BERM DETAILS

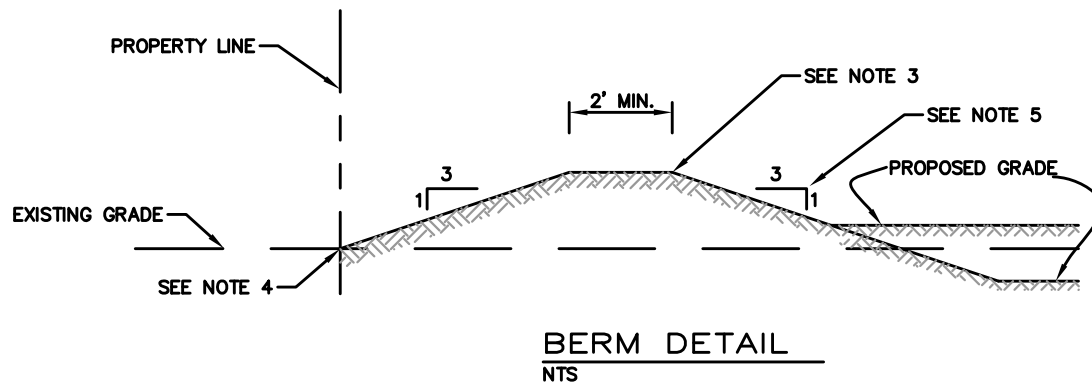

### NOTES:

1. BERM TO BE CONSTRUCTED OF SUITABLE FILL MATERIAL. NO MUCK OR OPEN GRADED SILICA (SUGAR) SAND WILL BE ACCEPTABLE.
2. BERM TO BE COMPACTED TO 92% DENSITY AND SODDED OR STABILIZED IN AN APPROVED METHOD TO PREVENT EROSION.
3. TOP OF BERM OR WALL TO BE CONSTRUCTED TO A MINIMUM ELEVATION EQUAL TO THE PROJECTED 25 YEAR EVENT STORM.
4. NO TEMPORARY OR PERMANENT GRADING WORK SHALL ENCROACH ON ADJACENT PROPERTY.
5. SLOPES MUST BE 4H:1V OR SHALLOWER WHEN BANK IS PART OF A DRY DETENTION/RETENTION AREA.
6. PROVIDE ADEQUATE SEPARATION FROM PROPERTY LINE TO AVOID ABOVE OR BELOW GROUND ENCROACHMENTS ONTO ADJACENT PROPERTY DURING AND AFTER CONSTRUCTION.
7. WALLS SHALL BE DESIGNED PER THE STRUCTURAL DESIGN CRITERIA OF THE FLORIDA BUILDING CODE, LATEST EDITION.